

Installation Instructions for the FF Series Magnetically Actuated Safety Interlock Switches

ISSUE 1
50026830



⚠ WARNING

IMPROPER INSTALLATION

- Consult with local safety agencies and their requirements when designing a machine-control link, interface, and all control elements that affect safety.
- Strictly adhere to all installation instructions.

Failure to comply with these instructions could result in death or serious injury.

GENERAL INFORMATION

When installed on a machine guard, and the switch and actuator are within the specified operating range, the **safety contacts** will be closed and the **auxiliary contacts** will be open. (See table for switching distances).

When the actuator moves out of the operating range, the **safety contacts** will open. The **auxiliary contacts** will close for indication.

The FS* series safety switches and actuators are designed to approach each other from most angles. When the switch is closed, the targets on the printed face of the switch must align.

MOUNTING INFORMATION

The FS* safety switches can approach each other from most angles. When the switch is closed, targets on the printed face must align. See figure 1.

FIGURE 1. SWITCH ALIGNMENT (FF5 AND FF6)

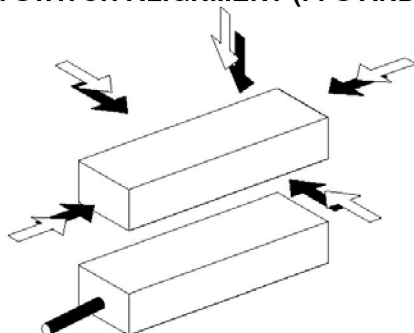


FIGURE 2. SWITCH ALIGNMENT (FF2 AND FF3)


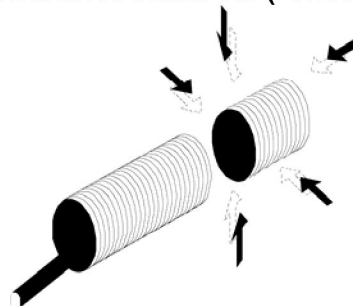


FIGURE 3. SWITCH ALIGNMENT (FF5)

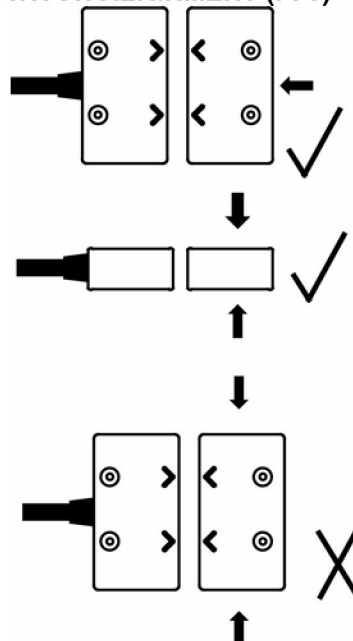

Mount the switch on the machine frame and the actuator on the opening edge of the door. Always try to mount the switch on non-ferrous material. *Ferrous material may reduce the switching distance.* Be sure to use tamper-proof screws. Do not use the safety switch as a door stop. Leave a minimum of 50 mm [1.97 in] between any adjacent switches. See figures 4 and 5.

FF Series Magnetically Actuated Safety Interlock Switches

Issue 1 50026830

**FIGURE 4. DO NOT USE THE SAFETY SWITCH AS A DOOR STOP
WRONG!**






FIGURE 5. MINIMUM DISTANCE BETWEEN SWITCHES

Leave a 2 mm [0.08 in] gap to prevent damage

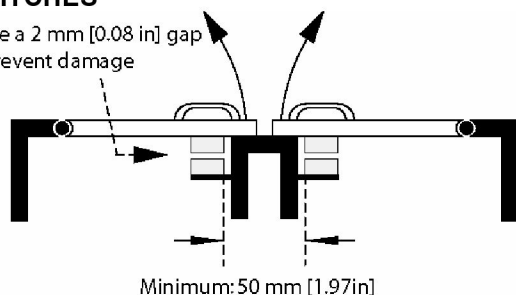

When fixing the safety switch to a sliding door (A), ensure that when the door is opened (B) it is not easily accessible, helping prevent the system being overridden. See figure 6.

FIGURE 6. PLACEMENT FOR SLIDING DOORS

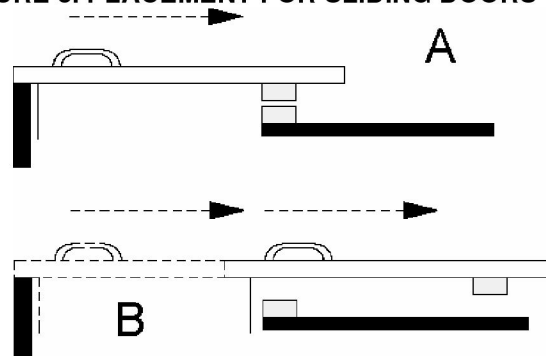

SPECIFICATIONS

Type	FF2-10-AC FF2-11-AC	FF2-10-DC FF2-11-DC	FF3-20-AC FF3-21-AC	FF3-20-DC FF3-21-DC	FF5	FF5-SS
Contact arrangement	1NC (FF2-10-AC) 1NC/1NO (FF2-11-AC)	1NC (FF2-10-DC); 1NC/1NO (FF2-11-DC)	2NC (FF3-20-AC) 2NC/1NO (FF3-21-AC)	2NC (FF3-20-DC); 2NC/1NO (FF3-21-DC)	Max: 2NC safety and 1NO auxiliary	Max: 2NC safety and 1NO auxiliary
Safety contact rating	230 Vac/2 A	30 Vdc/1 A inductive/ resistive	230 Vac/2A	30 Vdc/1 A inductive/ resistive	24 Vdc/0.3 A inductive/resistive	24 Vdc/0.3 A inductive/resistive
Safety contact operating distance	10 mm [0.4 in] ON; 30 mm [1.18 in] OFF	10 mm [0.4 in] ON; 30 mm [1.18 in] OFF	10 mm [0.4 in] ON; 35 mm [1.38 in] OFF	10 mm [0.4 in] ON; 35 mm [1.38 in] OFF	6 mm [0.24 in] ON; 17 mm [0.67 in] OFF	6 mm [0.24 in] ON; 17 mm [0.67 in] OFF
Safety contact close/drop/bounce	3 ms/2.1 ms/ 0.7 ms	3 ms/2.1 ms/ 0.7 ms	3 ms/2.1 ms/ 0.7 ms	3 ms/2.1 ms/ 0.7 ms	3 ms/2.1 ms/ 0.7 ms	3 ms/2.1 ms/ 0.7 ms
Auxiliary contact rating	15 W/10 VA	15 W/10 VA	15 W/10 VA	15 W/10 VA	24 Vdc/0.3 A inductive/resistive	24 Vdc/0.3 A inductive/resistive
Auxiliary contact operating distance	7 mm [0.28 in] OFF; 14 mm [0.55 in] ON	7 mm [0.28 in] OFF; 14 mm [0.55 in] ON	7 mm [0.28 in] OFF; 20 mm [0.79 in] ON	7 mm [0.28 in] OFF; 20 mm [0.79 in] ON	6 mm [0.24 in] OFF; 17 mm [0.67 in] ON	6 mm [0.24 in] OFF; 17 mm [0.67 in] ON
Auxiliary contact close/drop/bounce	0.5 ms/0.3 ms/ 0.7 ms	0.5 ms/0.3 ms/ 0.7 ms	0.5 ms/0.3 ms/ 0.7 ms	0.5 ms/0.3 ms/ 0.7 ms	0.5 ms/0.3 ms/ 0.7 ms	0.5 ms/0.3 ms/ 0.7 ms
Internal fuse	ac: 2 A fast acting	dc: 1 A fast acting	ac: 2 A fast acting	dc: 1 A fast acting	Not applicable	Not applicable
External fuse (cust. supplied)	ac: 1.6 A fast acting	dc: 0.8 A fast acting	ac: 1.6 A fast acting	dc: 0.8 A fast acting	dc: 0.2 A fast acting	dc: 0.2 A fast acting
IP rating	IP67	IP67	IP67	IP67	IP67	IP67
Vibration/shock	50 Hz to 100 Hz/ 10 g	50 Hz to 100 Hz/ 10 g	50 Hz to 100 Hz/ 10 g	50 Hz to 100 Hz/ 10 g	50 Hz to 100 Hz/ 10 g	50 Hz to 100 Hz/ 10 g
Operating temperature	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]
Mounting and fixture	Target to target	Target to target	Target to target	Target to target	Target to target	Target to target
Construction	Red ABS resin filled	Red ABS resin filled	Red ABS resin filled	Red ABS resin filled	Red ABS resin filled	316 grade stainless steel resin filled

FF Series Magnetically Actuated Safety Interlock Switches

Issue 1 50026830

SPECIFICATIONS

Type	FF6 ac	FF6 dc	FF6-SS ac	FF6-SS dc
Contact arrangement	Max: 2NC safety and 1NO auxiliary	Max: 2NC safety and 1NO auxiliary	1NC safety	Max: 2NC safety and 1NO auxiliary
Safety contact rating	230 Vac/2 A	30 Vdc/1 A inductive/resistive	230 Vac/2A	30 Vdc/1 A inductive/resistive
Safety contact operating distance	10 mm [0.4 in] ON; 30 mm [1.18 in] OFF	10 mm [0.4 in] ON; 30 mm [1.18 in] OFF	10 mm [0.4 in] ON; 30 mm [1.18 in] OFF	10 mm [0.4 in] ON; 30 mm [1.18 in] OFF
Safety contact close/drop/bounce	3 ms/2.1 ms/0.7 ms	3 ms/2.1 ms/0.7 ms	3 ms/2.1 ms/0.7 ms	3 ms/2.1 ms/0.7 ms
Auxiliary contact rating	15 W/10 VA	15 W/10 VA		15 W/10 VA
Auxiliary contact operating distance	7 mm [0.28 in] OFF; 20 mm [0.79 in] ON	7 mm [0.28 in] OFF; 20 mm [0.79 in] ON		7 mm [0.28 in] OFF; 20 mm [0.79 in] ON
Auxiliary contact close/drop/bounce	0.5 ms/0.3 ms/0.7 ms	0.5 ms/0.3 ms/0.7 ms		0.5 ms/0.3 ms/0.7 ms
Internal fuse	ac: 2 A fast acting	dc: 1 A fast acting	ac: 2 A fast acting	dc: 1 A fast acting
External fuse (customer supplied)	ac: 1.6 A fast acting	dc: 0.8 A fast acting	ac: 1.6 A fast acting	dc: 0.8 A fast acting
IP rating	IP67	IP67	IP67	IP67
Vibration/shock	50 Hz to 100 Hz/10 g	50 Hz to 100 Hz/10 g	50 Hz to 100 Hz/10 g	50 Hz to 100 Hz/10 g
Operating temperature	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]
Mounting and fixture	Target to target	Target to target	Target to target	Target to target
Construction	Red ABS resin filled	Red ABS resin filled	316 grade stainless steel resin filled	316 grade stainless steel resin filled

Type	FFS-11-03	FFS-20-03	FFS-11-QD	FFS-20-QD
Contact arrangement	Max: 1NC safety and 1NO auxiliary	Max: 2NC safety	Max: 1NC safety and 1NO auxiliary	Max: 2NC safety
Safety contact rating	230 Vac/2 A 30 Vdc/2 A	230 Vac/2 A 30 Vdc/2 A	230 Vac/2 A 30 Vdc/2 A	230 Vac/2 A 30 Vdc/2 A
Safety contact operating distance	7 mm [0.28 in] ON; 12 mm [0.47 in] OFF	7 mm [0.28 in] ON; 12 mm [0.47 in] OFF	7 mm [0.28 in] ON; 12 mm [0.47 in] OFF	7 mm [0.28 in] ON; 12 mm [0.47 in] OFF
Safety contact close/drop/bounce	3 ms/2.1 ms/0.7 ms	3 ms/2.1 ms/0.7 ms	3 ms/2.1 ms/0.7 ms	3 ms/2.1 ms/0.7 ms
Auxiliary contact rating	15 W/10 VA		15 W/10 VA	
Auxiliary contact operating distance	7 mm [0.28 in] OFF; 12 mm [0.47 in] ON		7 mm [0.28 in] OFF; 12 mm [0.47 in] ON	
Auxiliary contact close/drop/bounce	0.5 ms/0.3 ms/0.7 ms		0.5 ms/0.3 ms/0.7 ms	
Internal fuse	Not applicable	Not applicable	Not applicable	Not applicable
External fuse (customer supplied)	3 A/230 Vac, 1 A/30 Vdc	3 A/230 Vac, 1 A/30 Vdc	3 A/230 Vac, 1 A/30 Vdc	3 A/230 Vac, 1 A/30 Vdc
IP rating	IP67	IP67	IP67	IP67
Supply voltage	24 Vdc	24 Vdc	24 Vdc	24 Vdc
Vibration/shock	50 Hz to 100 Hz/10 g	50 Hz to 100 Hz/10 g	50 Hz to 100 Hz/10 g	50 Hz to 100 Hz/10 g
Operating temperature	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]	-10 °C to 55 °C [14 °F to 131 °F]
Mounting and fixture	Target to target	Target to target	Target to target	Target to target
Construction	Blue ABS resin filled	Blue ABS resin filled	Blue ABS resin filled	Blue ABS resin filled

FF Series Magnetically Actuated Safety Interlock Switches

Issue 1 50026830









DIMENSIONS

<div>FF2 MM[IN]</div> <div><p>SWITCH</p><p>ACTUATOR</p></div>	<div>FF3 MM[IN]</div> <div><p>SWITCH</p><p>ACTUATOR</p></div>	<div>FF6 STAINLESS STEEL PRE-WIRED MM[IN]</div> <div><p>ACTUATOR</p><p>SWITCH</p></div>
<div>FF5 MM[IN]</div> <div><p>FF5 ABS</p><p>FF5 SS</p></div>	<div>FF6 PRE-WIRED MM[IN]</div> <div><p>SWITCH</p><p>ACTUATOR</p></div>	
<div>FF6 QUICK CONNECT MM[IN]</div> <div><p>SWITCH</p><p>ACTUATOR</p></div>	<div>FFS PRE-WIRED MM[IN]</div> <div><p>SWITCH</p><p>ACTUATOR</p></div>	<div>FFS QUICK CONNECT MM[IN]</div> <div><p>SWITCH</p><p>ACTUATOR</p><p>(WITH M12 BRAD HARRISON CONNECTOR)</p></div>

FF Series Magnetically Actuated Safety Interlock Switches

Issue 1 50026830


CONTACTS AND CONNECTIONS

FF2-10 FF2-10-AC & FF2-10-DC  <p>Brown } Safety Contact 1 NC Blue }</p>	FF3-20 FF3-20-AC & FF3-20-DC  <p>Brown } Safety Contact 1 NC Blue } Black } Safety Contact 2 NC White }</p>
FF2-11 FF2-11-AC & FF2-11-DC  <p>Red } Safety Contact 1 NC Blue } Green } Auxiliary Contact 1 NO Yellow }</p> <div style="display: flex; justify-content: space-around;"> <div> FF2-11-AC-03 FF2-11-DC-03  </div> <div> FF2-10-AC-03 FF2-10-DC-03  </div> </div>	FF3-21 FF3-21-AC & FF3-21-DC  <p>Red } Safety Contact 1 NC Blue } Black } Safety Contact 2 NC White } Green } Auxiliary Contact 1 NO Yellow }</p> <div style="display: flex; justify-content: space-around;"> <div> FF3-21-AC-03 FF3-21-DC-03  </div> <div> FF3-20-AC-03 FF3-20-DC-03  </div> </div>


FF5

The safety contact must be fused externally. dc switch – external fuse= 0.2 A fast acting

FF5 Connections


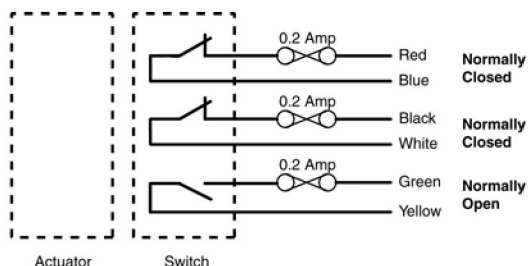


FF5 High Temperature Connections


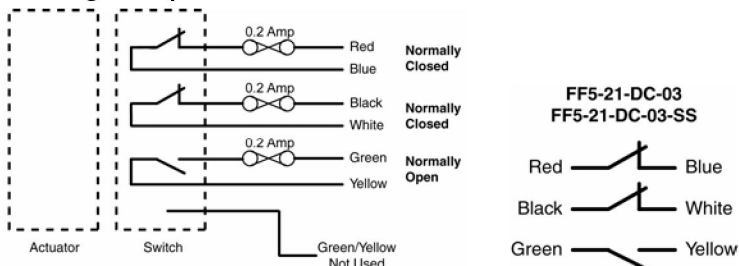


FFS


FFS-20-03

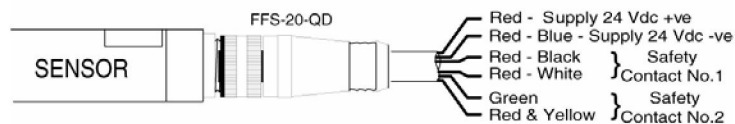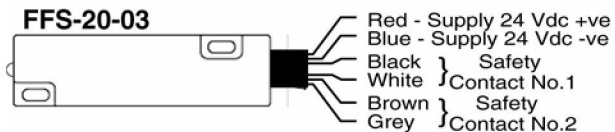


FFS-11-03

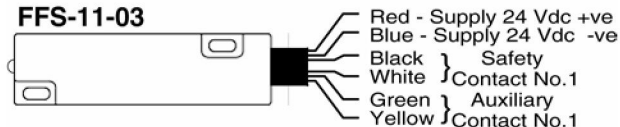

FFS-20-03 Connections

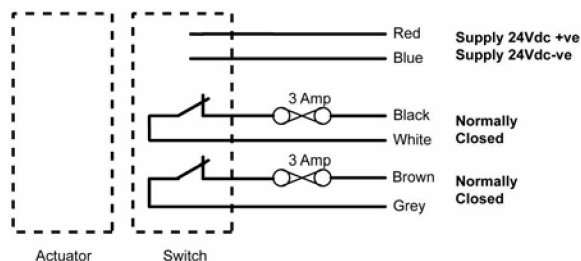

FFS-11-03 Connections





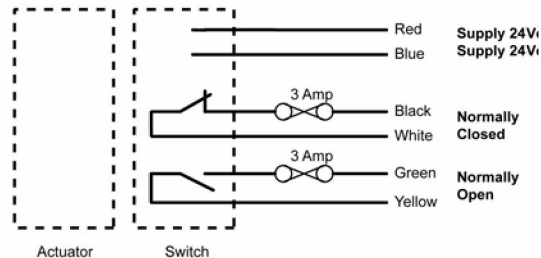


NOTE: Contact configurations show under closed condition for guard device.

FF Series Magnetically Actuated Safety Interlock Switches






Issue 1 50026830

CONTACTS AND CONNECTIONS

FF6-21-ABS (ac & dc) FF6-21-SS (dc only)	FF6-20 ABS (ac & dc) FF6-20 SS (dc only)	FF6-11 ABS (ac & dc) FF6-11 (dc only)	FF6-10 ABS (ac & dc) FF6-10 SS (ac & dc)
			
FF6-10-03-SS 			

NOTE: Contact configurations show under closed condition for guard device.

QUICK DISCONNECT CONNECTIONS

FF6-21-AC-QD05 FF6-21-DC-QD05	FF6-20-AC-QD05 FF6-20-DC-QD05	FF6-11-AC-QD05 FF6-11-DC-QD05	FF6-10-AC-QD05 FF6-10-DC-QD05
			
FF6-10-AC-SS-QD05 			

FF Series Magnetically Actuated Safety Interlock Switches

Issue 1 50026830

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items it finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

SALES AND SERVICE

Honeywell serves its customers through a worldwide network of sales offices, representatives and distributors. For application assistance, current specifications, pricing or name of the nearest Authorized Distributor, contact your local sales office or:

E-mail: info.sc@honeywell.com

Internet: www.honeywell.com/sensing

Phone and Fax:

Asia Pacific	+65 6355-2828 +65 6445-3033 Fax
Europe	+44 (0) 1698 481481 +44 (0) 1698 481676 Fax
Latin America	+1-305-805-8188 +1-305-883-8257 Fax
USA/Canada	+1-800-537-6945 +1-815-235-6847 +1-815-235-6545 Fax

Sensing and Control
Honeywell
1985 Douglas Drive North
Minneapolis, MN 55422
www.honeywell.com/sensing

Honeywell

50026830-1-EN IL50 GLO Printed in USA
May 2007
© 2007 Honeywell International Inc. All Rights Reserved.